




# SOUTHWEST BUSINESS PRODUCTS LTD.


— From Bindings to Branding —

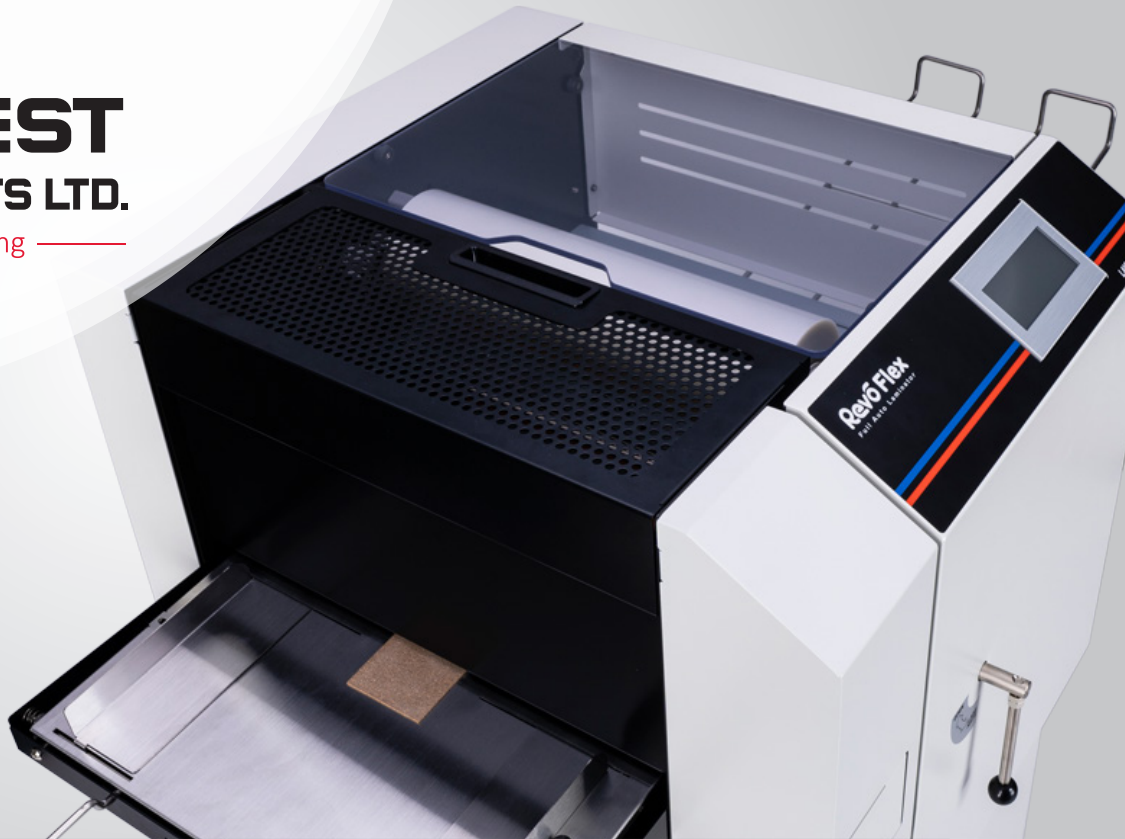

## Revo Flex Automatic Laminator

MARLREVOFLEX

The Revo Flex 4 side trimming system allows for true flush cuts or encapsulating a sheet with lamination. The position of the cuts are fully adjustable to create perfect flush cuts or custom size encapsulation borders. No need for additional processing to trim all 4 sides of a sheet. Feeding, laminating, cutting and trimming are now fully automated with the press of the start button.

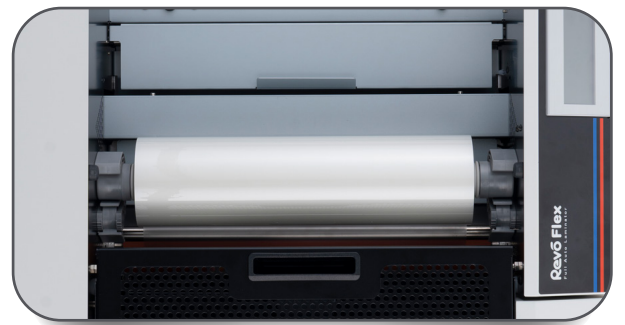

### Reduce Trim Waste

New various run modes to reduce or eliminate trimming waste. 70% less trim waste than other systems even when running in full trim mode. No waste mode totally eliminates between the sheet trim when encapsulating sheets.

HALIFAX NS  
902.477.0382

MONTREAL QC  
514.694.7741

OTTAWA ON  
613.744.7004

TORONTO ON  
416.285.7044

CALGARY AB  
403.717.1707

VANCOUVER BC  
604.574.9508



**SOUTHWEST  
BUSINESS PRODUCTS LTD.**

From Bindings to Branding

# Revo Flex

Fully Automatic Laminator

## Features

- 4 side internal trimming system for flush cut or encapsulation
- New no waste run mode eliminates sheet trim
- Compact design with stand included
- Automatic paper feed, laminate and cutting in one process with one button push start
- Automatically stops when complete
- Adjustable speed for high quality results on various sheet weights and film thickness
- Process up to 420 sheets per hour
- Simple access from top for easy roll change
- Adjustable resist roller pressure to stop multi-sheet feedover a range of paper stocks
- Feeder holds up to 200 sheets
- Easy to use touch panel for all adjustments

## SPECS

Max. Laminating Width	12.6"
Speed	27.5" - 78.7" / min (0.7 - 2.0m / min)
Film Thickness	1.5, 3, 5 mil
Max. Laminating Thickness	0.4 mm including paper and film
Heat Type	Heated rollers*
Temperature Range	176 - 284°F
Warm-up Time	5 minutes
Min. Sheet Size (LxW)	6.75" x 7.75"
Max. Sheet Size (LxW)	Infinite (long mode) x 13"
Paper Feed Capacity	200 sheets (80 lb. bond)
Trimming Methods	Flush cut or border cut
Operation Panel	LCD display
Electrical Req.	120V or 240V
Dimensions (LxWxH)	51" x 24" x 42.5" (with stand, feeder tray, extension tray, stacker)
Laminator Weight	154 lbs



HALIFAX NS  
902.477.0382

MONTREAL QC  
514.694.7741

OTTAWA ON  
613.744.7004

TORONTO ON  
416.285.7044

CALGARY AB  
403.717.1707

VANCOUVER BC  
604.574.9508