



# SOUTHWEST BUSINESS PRODUCTS LTD.

From Bindings to Branding



## CUTTERS

**VRCU<sup>i</sup>**  
CUT WITH CONFIDENCE  
by **LYTROD**  
SOFTWARE

A revolutionary tool to create and cut documents with ease is standard on 5260, 5560, 6660 and 7260 models!

A must in every print shop. Cutters are used for cutting business cards, reams of paper and more.

Southwest helps you by taking in your used equipment as a trade-in towards the purchase of brand new equipment

Interested in upgrading to new equipment, but you're not sure what to do with your existing one? Do you have equipment lying around that you are no longer using? Want to save even more money on the purchase of new equipment?

We will consider all trade-ins regardless of what you are buying. Looking for a new laminator, but need to clear out space by removing the binding equipment you are no longer using?

We can take care of that for you.



HALIFAX NS  
902.477.0382

MONTREAL QC  
514.694.7741

OTTAWA ON  
613.744.7004

TORONTO ON  
416.285.7044

CALGARY AB  
403.717.1707

VANCOUVER BC  
604.574.9508

# model overview

# Cutters



	Triumph 4300 manual tabletop	Triumph 4305 manual tabletop	Triumph 4705 manual tabletop
Cutting width, inches	16 <sup>7</sup> / <sub>8</sub>	16 <sup>7</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>
Cutting height, inches	<sup>3</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>2</sub>	2 <sup>3</sup> / <sub>4</sub>
Narrow cut, inches	1 <sup>1</sup> / <sub>2</sub>	1 <sup>5</sup> / <sub>16</sub>	1 <sup>3</sup> / <sub>16</sub>
Length behind blade, inches	13 <sup>3</sup> / <sub>8</sub>	17	18
Blade drive	manual	manual	manual
Clamp type	fast-action lever	fast-action lever	spindle
Foot pedal for pre-clamping	-	-	-
Back gauge	manual	manual	manual
Manual back gauge setting mechanism	slide with lock screw	calibrated hand crank	calibrated hand crank
Measurement indication	side guide scale (mm/inch)	side guide scale (mm/inch)	front table scale (mm/inch)
Electronic back gauge control	-	-	-
Programmability	-	-	-
Air table (front and rear)	-	-	-
Optical cutting line indicator	-	-	-
Front table safety element	transparent guard	transparent guard	transparent guard
3-step front table illumination	-	-	-
Patented EASY CUT blade activation bars	-	-	-
Drop-in tool holder on rear table	-	-	-
Optional accessories	stand or cabinet	stand or cabinet	stand
Electrical requirements	-	-	-
Motor output, horsepower	-	-	-
Dimensions (D x W x H), inches	22 <sup>1</sup> / <sub>2</sub> x 28 x 18 <sup>1</sup> / <sub>2</sub> (47 <sup>1</sup> / <sub>2</sub> <sup>1</sup> )	34 <sup>5</sup> / <sub>8</sub> x 34 <sup>5</sup> / <sub>8</sub> x 15 <sup>3</sup> / <sub>4</sub> (45 <sup>1</sup> / <sub>4</sub> <sup>1</sup> / 44 <sup>2</sup> )	35 x 39 x 23 (50 <sup>1</sup> )
Shipping weight pounds	95 (121 <sup>1</sup> / 190 <sup>2</sup> )	115 (141 <sup>1</sup> / 210 <sup>2</sup> )	297 (320 <sup>1</sup> )

<sup>1</sup> with stand    <sup>2</sup> with cabinet    <sup>3</sup> with side tables    \*available by special order only



**High Quality Blades**  
All Triumph cutter models feature high quality, German steel blades.



**Side Guide Back Gauge Scale**  
A measurement scale on the side guide ensures precise back gauge setting (models 4300, 4305).



**Fast-Action Clamp**  
Throw the lever on the fast-action clamp to tighten, then cut (models 4300, 4305, 4315).



**Safe Blade Changes**  
Blade changes can be made without removing covers. The device covers the cutting edge of blade.



4315  
(with optional stand)



4350  
(with optional stand)



4815



4850



5255



5260



Triumph 4315 semi-automatic tabletop	Triumph 4350 automatic tabletop	Triumph 4815 semi-automatic	Triumph 4850 automatic	Triumph 5255 automatic programmable	Triumph 5260 automatic programmable
16 7/8"	16 7/8"	18 5/8"	18 5/8"	20 3/8"	20 3/8"
1 1/2"	1 1/2"	3"	3"	3"	3"
1 3/8"	1 3/8"	1"	1"	1 3/8"	1 3/8"
17"	17"	18"	18"	20 3/8"	20 3/8"
electric	electric	electric	electric	electric	electric
fast-action lever	automatic	spindle	automatic	automatic	automatic
-	-	-	-	-	-
manual	manual	manual	manual	electric	electric
calibrated hand crank	calibrated hand crank	calibrated hand crank	calibrated hand crank	electronic hand wheel	electronic hand wheel
digital display (cm/inch)	digital display (cm/inch)	digital display (cm/inch)	digital display (cm/inch)	digital display (cm/inch)	digital display (cm/inch)
-	-	-	-	touchpad module	touchpad module
-	-	-	-	99 programs (99 steps each)	99 programs (99 steps each)
-	-	-	-	-	-
•	•	•	•	•	•
electronic, transparent guard	electronic, transparent guard	electronic, transparent guard	electronic, transparent guard	electronic, transparent guard	IR light beam safety curtain
-	-	-	-	-	•
•	•	•	•	•	•
-	-	•	•	•	•
stand or cabinet	stand or cabinet	side tables	side tables	side tables	side tables
115 V, 60 Hz, 15 amps	115 V, 60 Hz, 15 amps	115 V, 60 Hz, 15 amps	115 V, 60 Hz, 20 amps	115 V, 60 Hz, 20 amps	115 V, 60 Hz, 20 amps
3/5	3/5	1.5	2	2	2
34 1/4 x 25 x 14 (42 3/4 <sup>1</sup> / 42 1/2 <sup>2</sup> )	34 1/4 x 25 x 14 (42 3/4 <sup>1</sup> / 42 1/2 <sup>2</sup> )	41 1/2 x 30 (53 <sup>3</sup> ) x 55 1/2	41 1/2 x 30 (53 <sup>3</sup> ) x 51	44 x 33 7/8 (56 1/2 <sup>3</sup> ) x 51	44 x 33 7/8 (56 1/2 <sup>3</sup> ) x 51
191 (217 <sup>1</sup> / 286 <sup>2</sup> )	200 (226 <sup>1</sup> / 295 <sup>2</sup> )	531 (552 <sup>3</sup> )	556 (577 <sup>3</sup> )	648 (669 <sup>3</sup> )	657 (677 <sup>3</sup> )


<sup>1</sup> with stand    <sup>2</sup> with cabinet    <sup>3</sup> with side tables  
\*available by special order only

*See back for more Automatic and Hydraulic Cutters >*



**■ Easy Cut Blade Activation Bars**

Patented EASY CUT blade activation bars ensure true, two-hand operation (models 4315 and above).

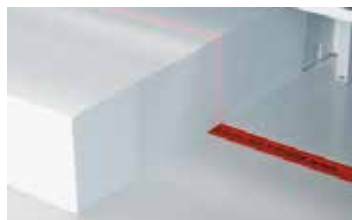

**■ Optical Cutting Line**

The optical cutting line indicator ensures perfect alignment of cutting marks (models 4315 and above).



**■ Front Table Digital Display**

A digital measurement display allows precise positioning of back gauge (models 4315-4850).



**■ VRCut Controller**

Controller software is installed on PC device directly connected to cutter (models 5260, 5560, 6660 and 7260).

## Automatic Cutters



6655



6660

**VRCUT**  
CUT WITH CONFIDENCE  
by LYTROD SOFTWARE

## Hydraulic Cutters



5560

**VRCUT**  
CUT WITH CONFIDENCE  
by LYTROD SOFTWARE



5560 LT  
(with optional side tables)



7260

**VRCUT**  
CUT WITH CONFIDENCE  
by LYTROD SOFTWARE

Triumph 6655 automatic programmable	Triumph 6660 automatic programmable	Triumph 5560 programmable hydraulic	Triumph 5560 LT* programmable hydraulic	Triumph 7260 programmable hydraulic
25 ½	25 ½	21 ⅝	21 ⅝	28
3	3	3 ¾ (3 ⅝ with false clamp)	3 ¾ (3 ⅝ with false clamp)	3 (with & without false clamp)
1	1	3 ¾ (3 ⅝ with false clamp)	1 ¼ (2 ⅝ with false clamp)	¾ (3 ½ with false clamp)
24	24	22 ⅞	22 ⅞	28
electric	electric	hydraulic	hydraulic	hydraulic
automatic	automatic	adjustable hydraulic	adjustable hydraulic	adjustable hydraulic
-	-	•	•	•
electric	electric	electric	electric	electric
electronic hand wheel	electronic hand wheel	electronic hand wheel	electronic hand wheel	electronic hand wheel
digital display (cm/inch)	digital display (cm/inch)	digital display (cm/inch)	digital display (cm/inch)	digital display (cm/inch)
touchpad module	touchpad module	touchpad module	touchpad module	keypad module
99 programs (99 steps each)	99 programs (99 steps each)	99 programs (99 steps each)	99 programs (99 steps each)	99 programs (99 steps each)
-	-	-	•	•
•	•	•	•	•
electronic, transparent guard	IR light beam safety curtain	IR light beam safety curtain	IR light beam safety curtain	IR light beam safety curtain
-	•	-	-	-
•	•	•	•	•
•	•	•	•	•
side tables	side tables	side tables	side tables	side tables
115 V, 60 Hz, 20 amps	115 V, 60 Hz, 20 amps	115 V, 60 Hz, 20 amps	115 V, 60 Hz, 20 amps	220 V, 3 phase
2	2	2	2	2
48 x 39 (61 ½ <sup>3</sup> ) x 51	48 x 39 (61 ½ <sup>3</sup> ) x 51	55 x 42 (64 <sup>3</sup> ) x 54	55 x 42 (64 <sup>3</sup> ) x 54	60 ½ (63 <sup>3</sup> ) x 51 ⅜ (82 ½ <sup>3</sup> ) x 52 ½
772 (793 <sup>3</sup> )	775 (796 <sup>3</sup> )	970 (1,008 <sup>3</sup> )	1,014 (1,052 <sup>3</sup> )	1,534 (1,622 <sup>3</sup> )

<sup>1</sup> with stand

<sup>2</sup> with cabinet

<sup>3</sup> with side tables

\*available by special order only



### ■ Easy-To-Use Touchpad

A multilingual, programmable touchpad module controls the back gauge on models 5255-5560 LT.



### ■ IR Safety Curtain

The IR light beam safety curtain ensures the highest level of operator safety (models 5260-6660, 5560, 5560LT & 7260).



### ■ Programmable Back Gauge

The programmable back gauge control module is capable of storing 99 programs with 99 steps each.



### ■ Air Table

Front and rear table air jets allow easy handling of large paper stacks (models 5560 LT and 7260).